



PE Peripheral pump series


PUMP

- Transfer of clean water or non-aggressive liquid
- Special anti-rust treatment for pump body and support
- AISI 304 shaft
- Max. liquid temperature: +40°C
- Max. suction: +9 m

MOTOR

- Copper winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Protection class: IPX4
- Max. ambient temperature: +40°C
- IE2 motor(Three phase, power \geq 0.75kW)

HYDRAULIC PERFORMANCE CURVE

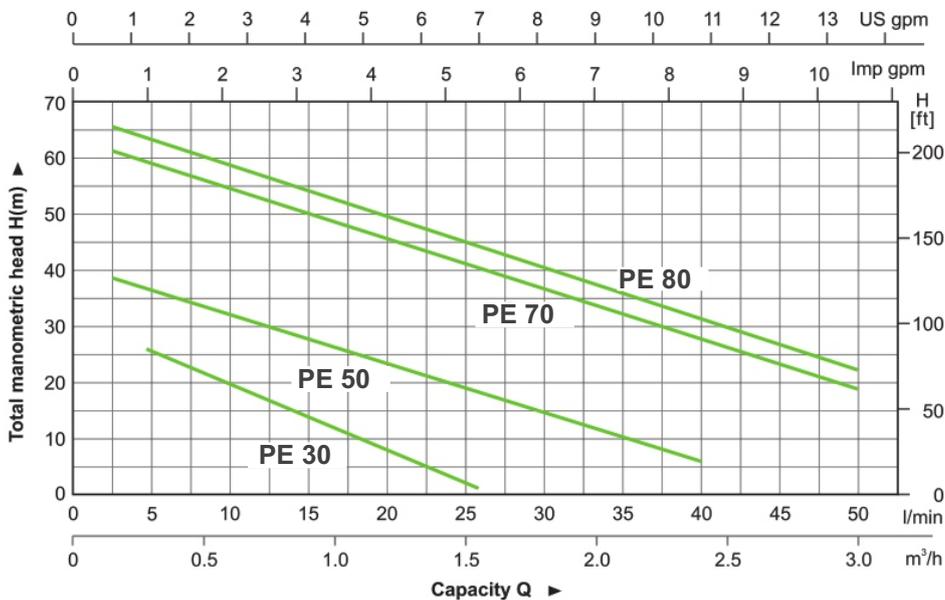

PERFORMANCE TABLE

MODEL	POWER		INLET / OUTLET	Max FLOW (L/min)	Max HEAD (m)	Max SUCTION (m)
	(HP)	(Kw)				
PE 30	0.35	0.25	1" x 1"	25	28	9
PE 50	0.50	0.37	1" x 1"	40	40	9
PE 70	0.80	0.60	1" x 1"	50	65	9
PE 80	1.00	0.75	1" x 1"	50	70	9